



SPLIT 12

1X2 4K SPLITTER
WITH AUDIO
DEMBEDDER

4K
60Hz

HDMI
2.0b


HDCP
2.2

HDR
10


3D



Applicable to different scenarios and meet multiple needs

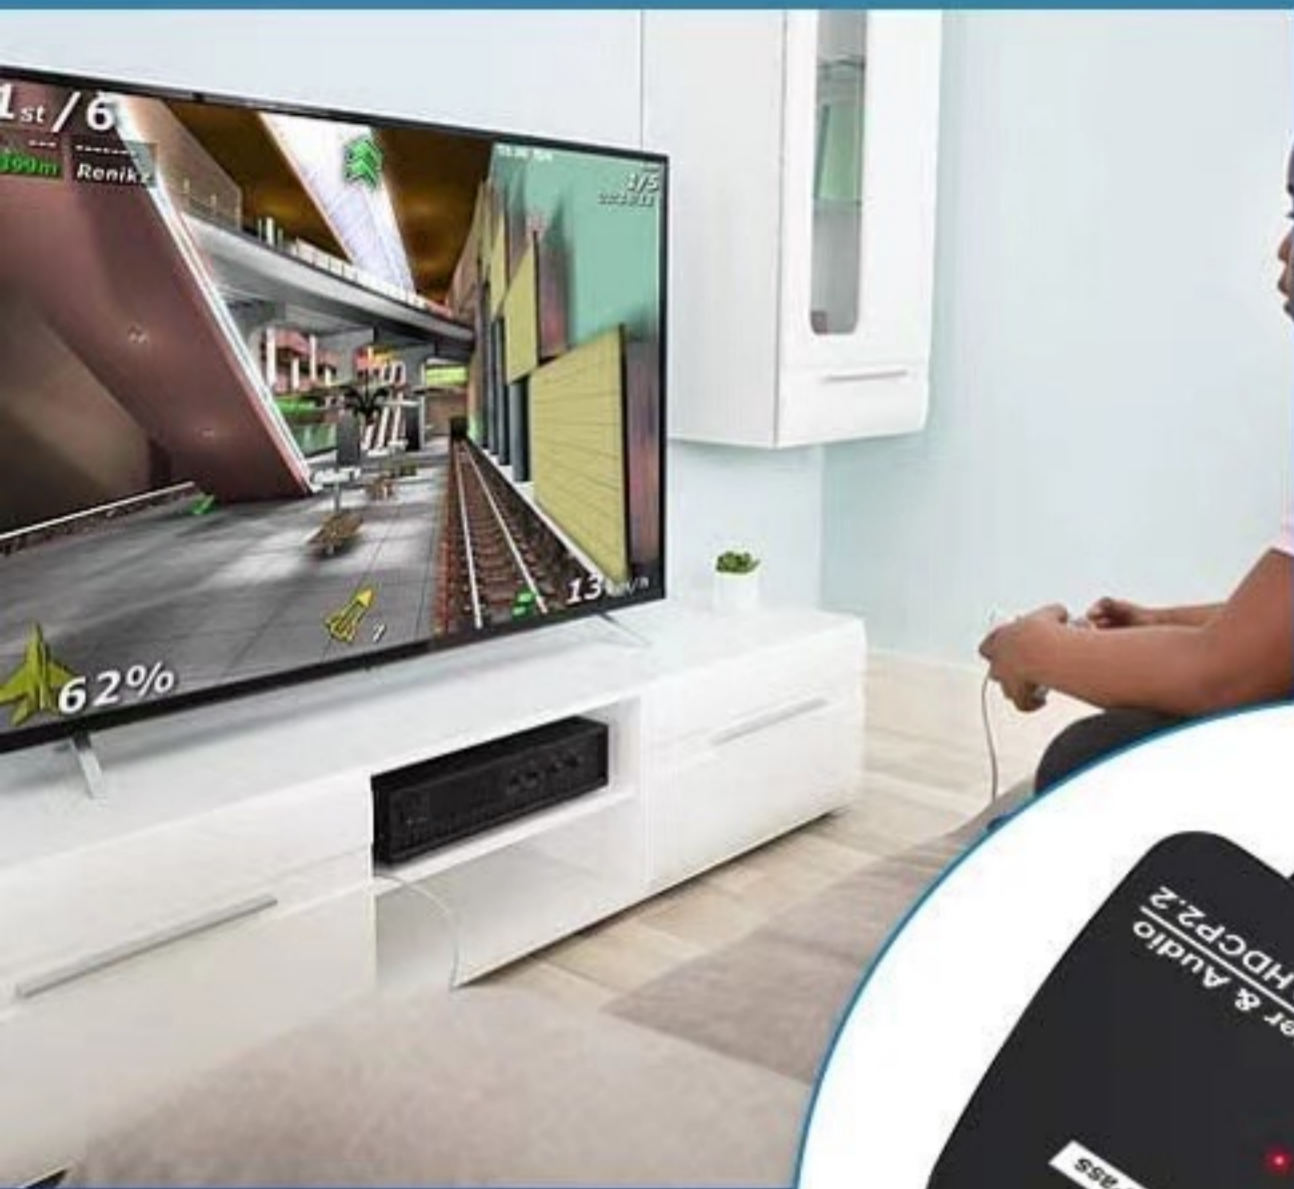


DISPLAY ON 2 SCREENS AT THE SAME TIME

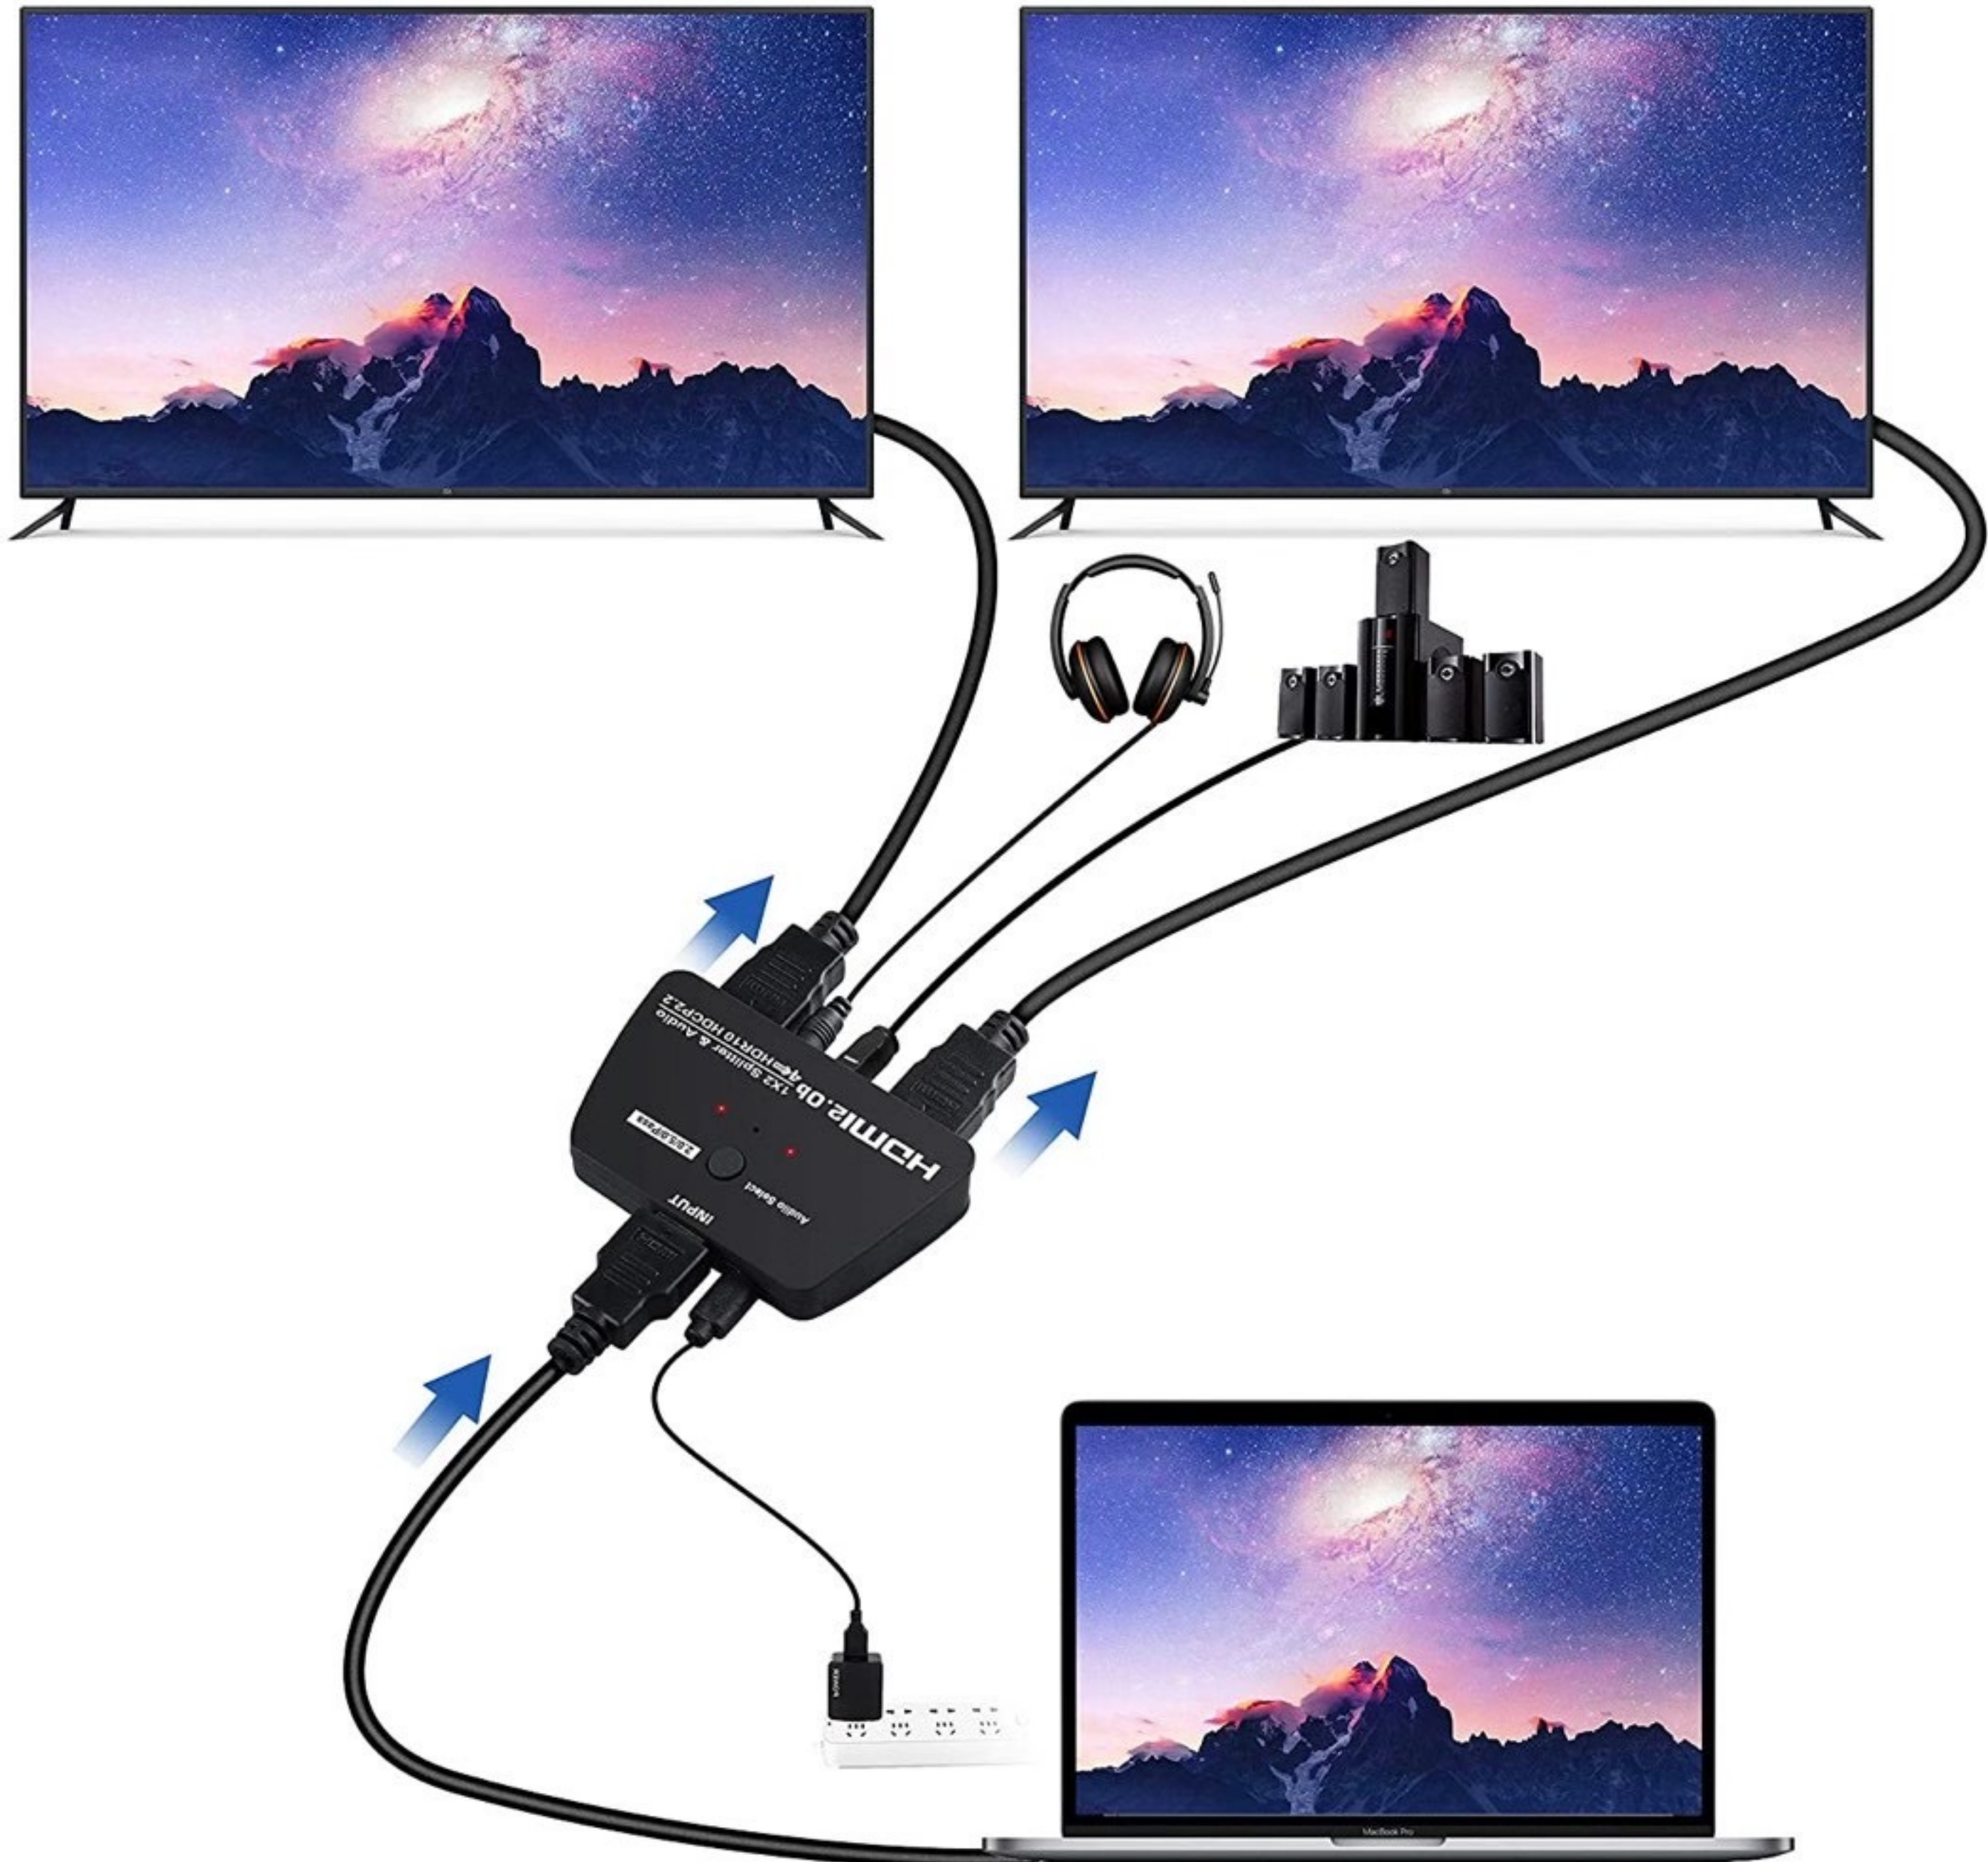

HDTV RESOLUTION UP TO 4K 60HZ

HDCP2.2 Compliant 18.5Gpbs, RGB8:8:8

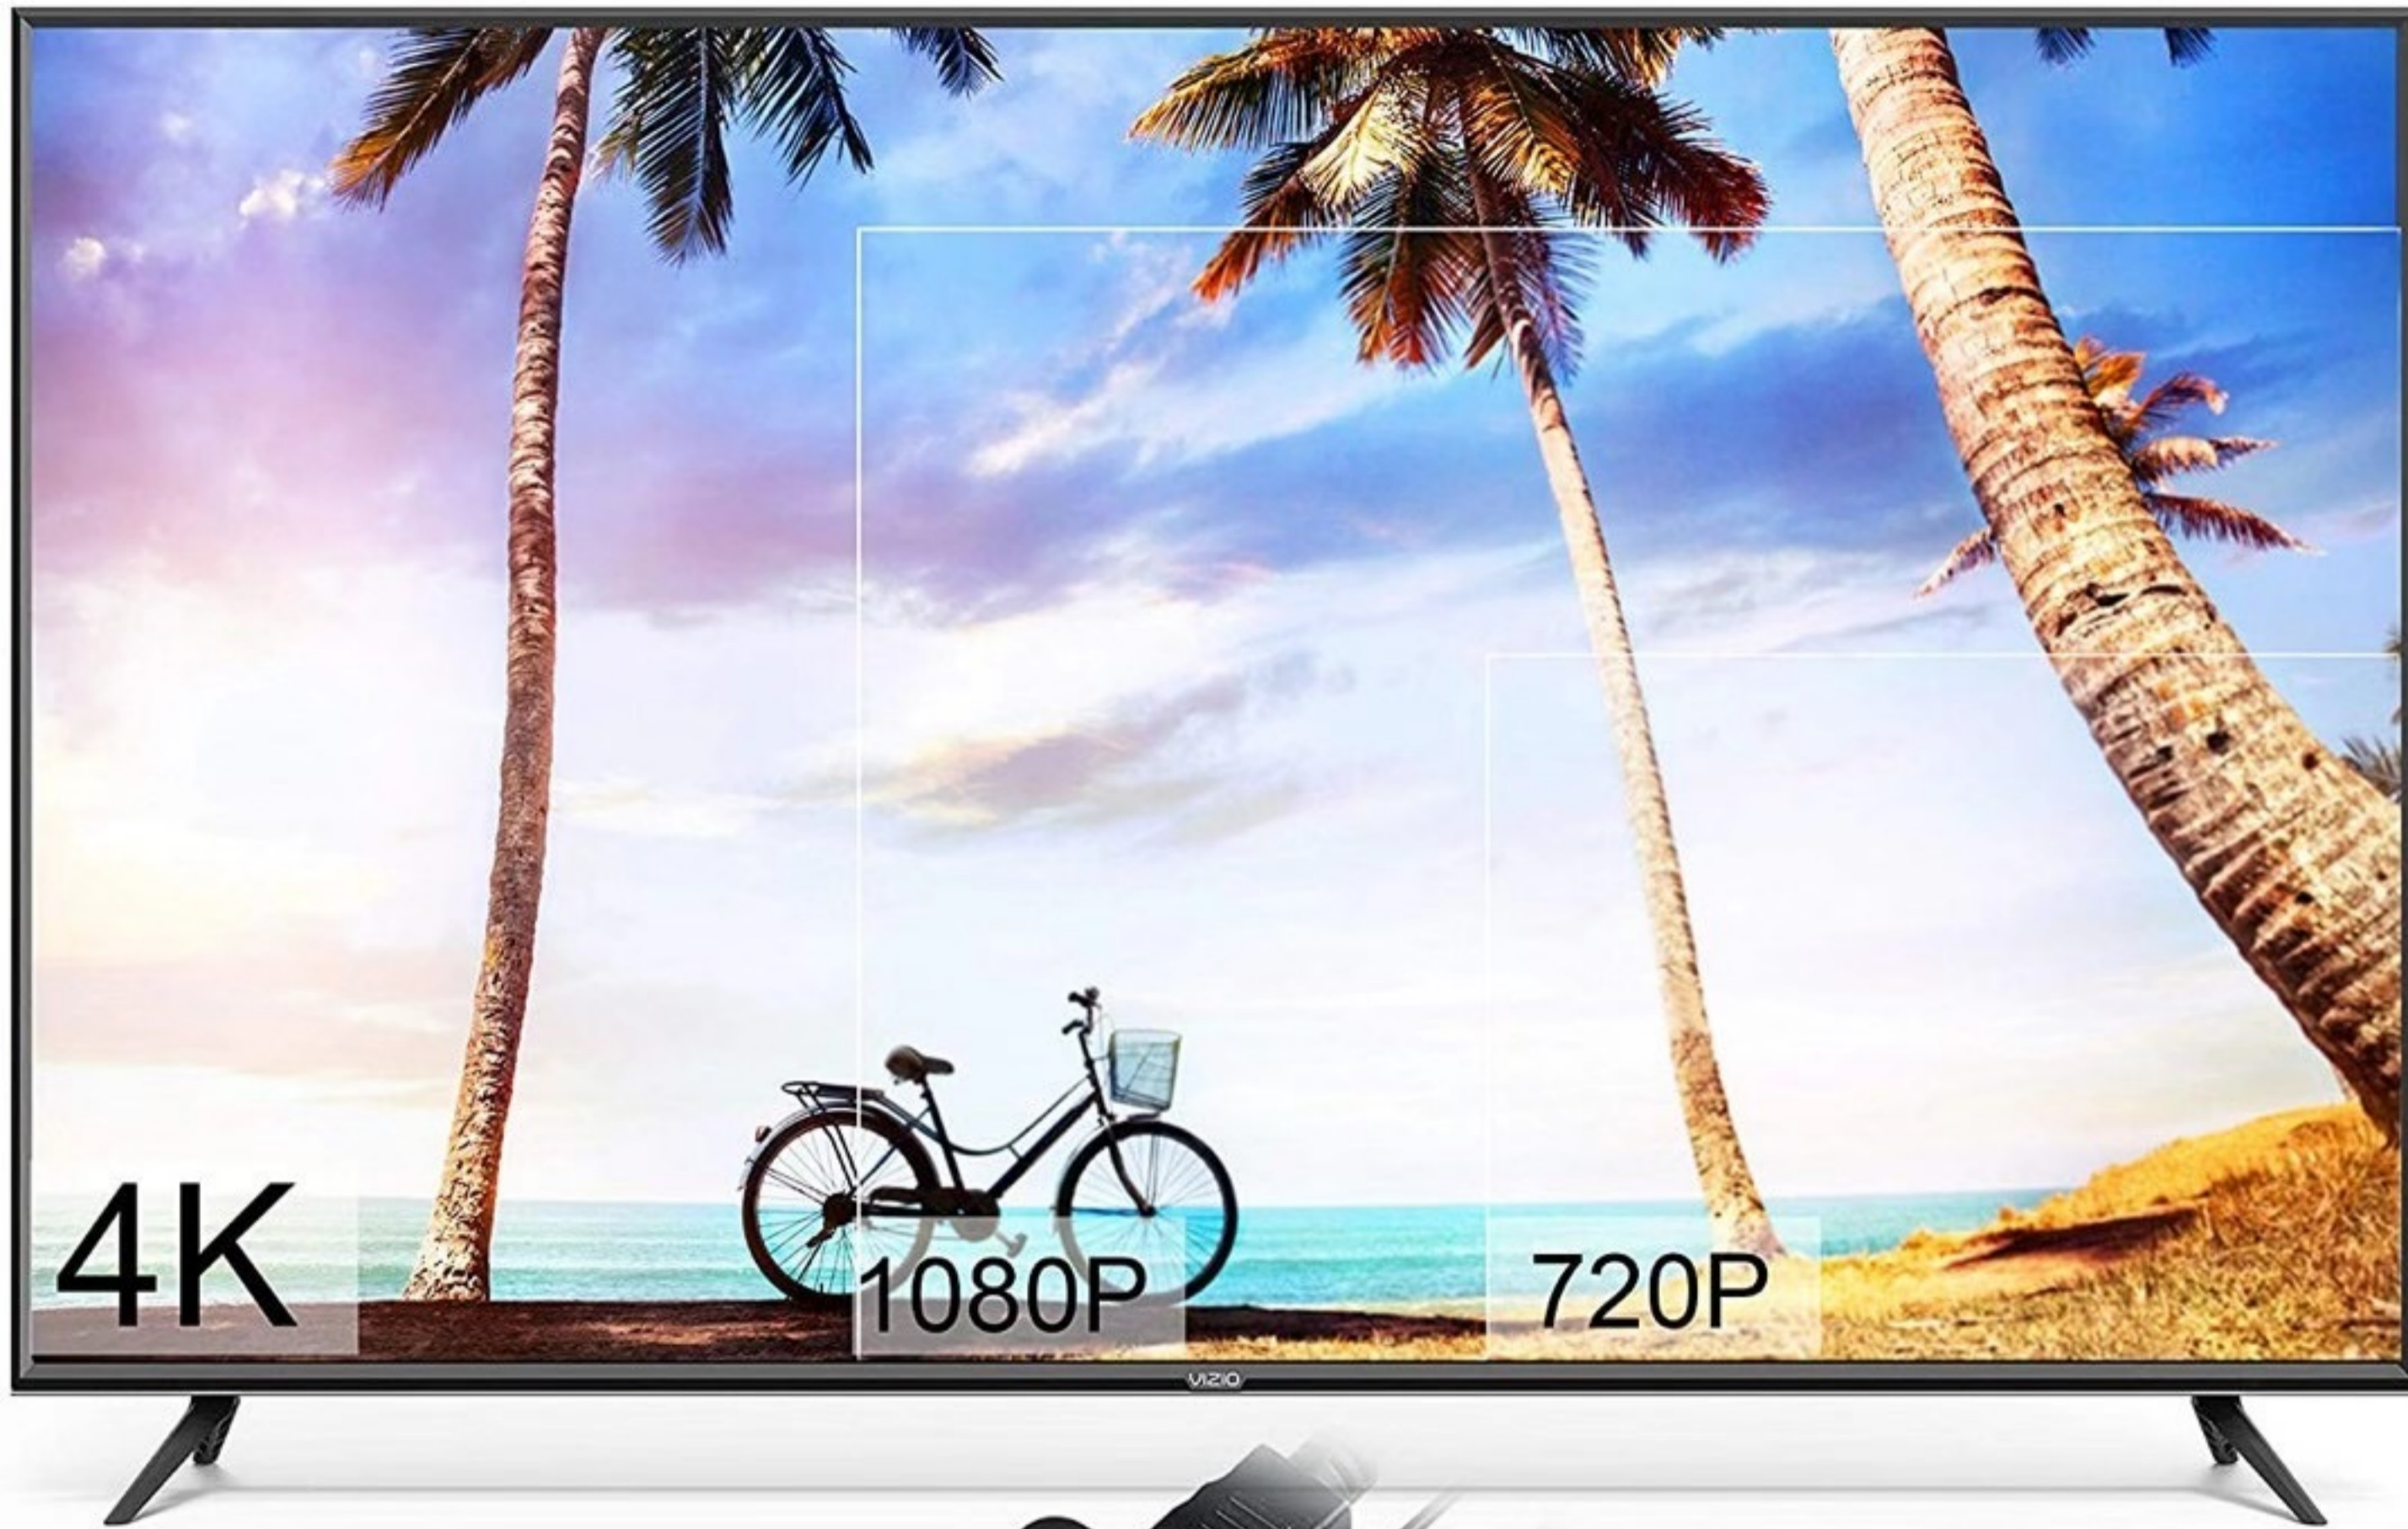



Audio Embed




DVD/PS3/STB



Blue-Ray DVD



X BOX

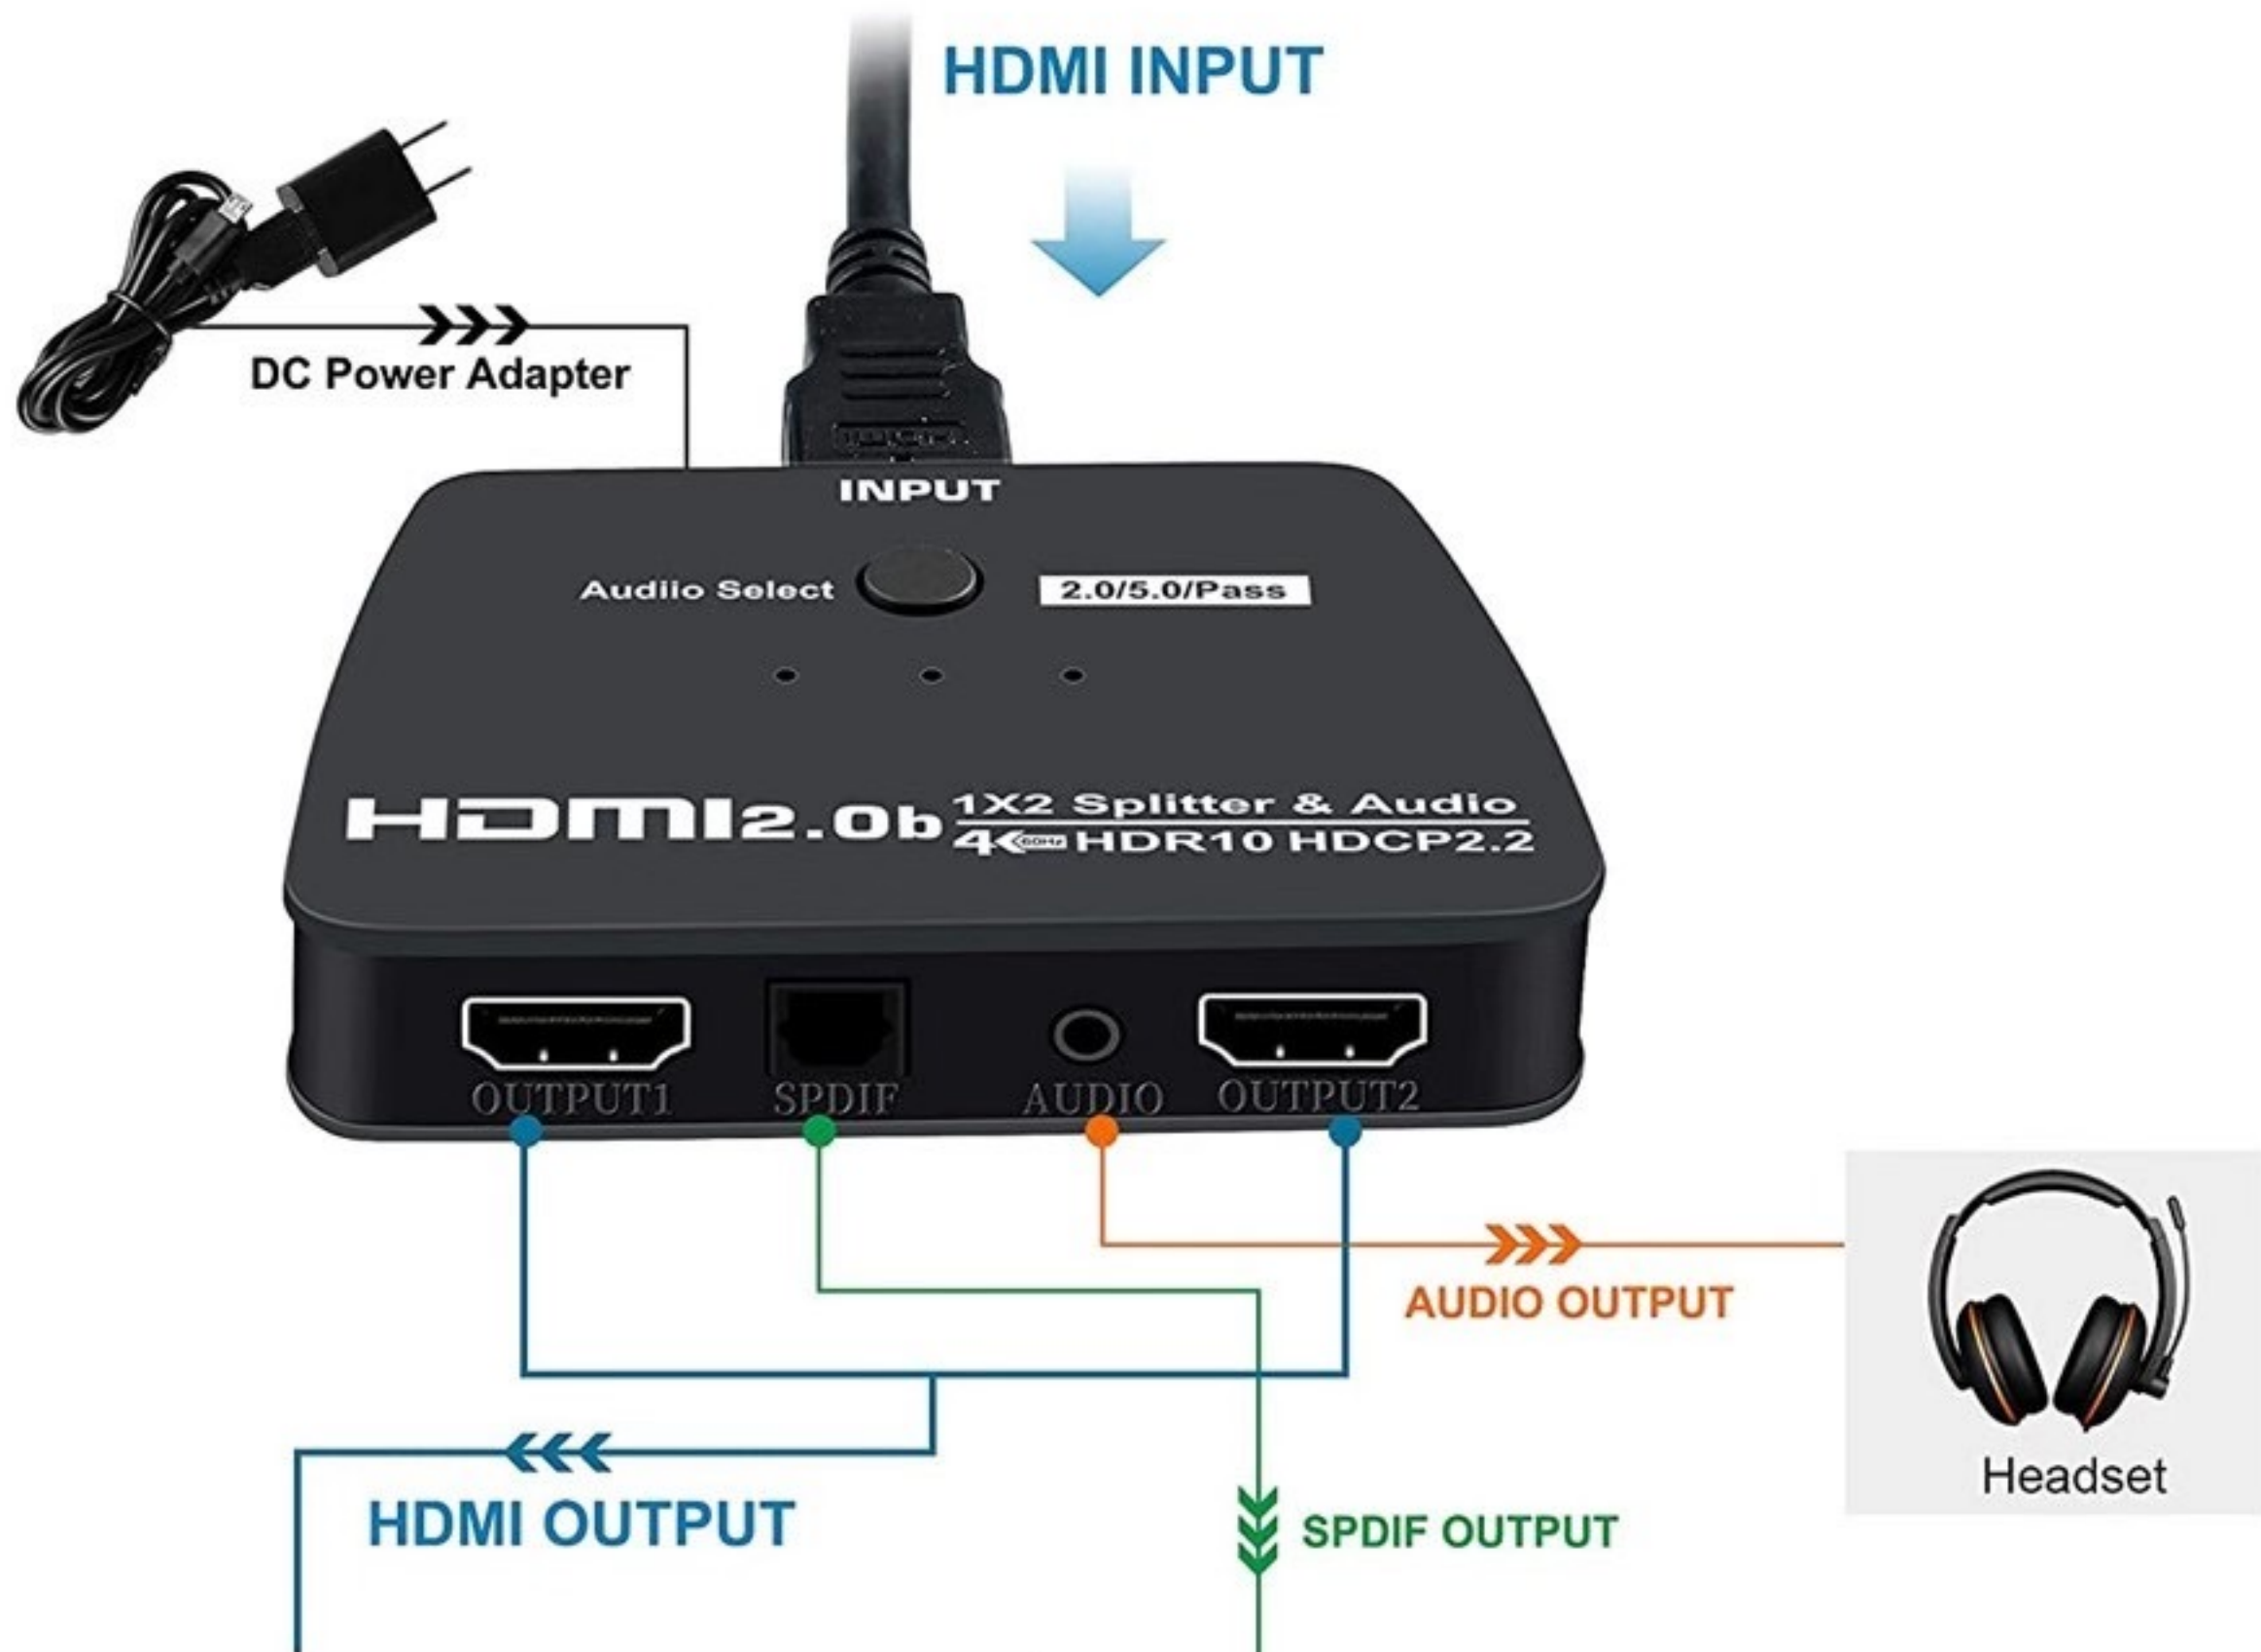

HDTV



Projector



Monitor



5.1 Speaker



Amplifier



Soundbar



Three Audio mode settings

PASS

The output audio format depends on the HDMI input signal. The audio can be copied to the HDMI output device.

2.0CH Mode

Set 2CH to get analog stereo audio. Extract the digital 2CH PCM stereo audio signal from the HDMI input and convert it to 2CH analog stereo output through its 3.5mm Audio/Optical SPDIF output at the same time.

5.1CH Mode

Set 5.1CH to get 5.1 digital surround.(HDMI input source must support 5.1CH), Which can be extracted via Optical SPDIF Output. It support Dobby TrueHD/DTS/ AC3/DSD Audio