





TM 01

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600 /700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Machine width, height dimensions and color support customization
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·Output Voltage: 12V	·LED Strip Position: On Top
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Black	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	



TM 02

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·400/500/600 /700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·Output Voltage: 12V	·LED Strip Position: On Top
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Black	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	



TONO





TM 03

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600/ 700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	

TONO





TM 04

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600/ 700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	

TONO





TM 05

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600/ 700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	






TM 06

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·400/500/600 /700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES
·Support Custom dimension and color
·Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS			
·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V	
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db	
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K	
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm		



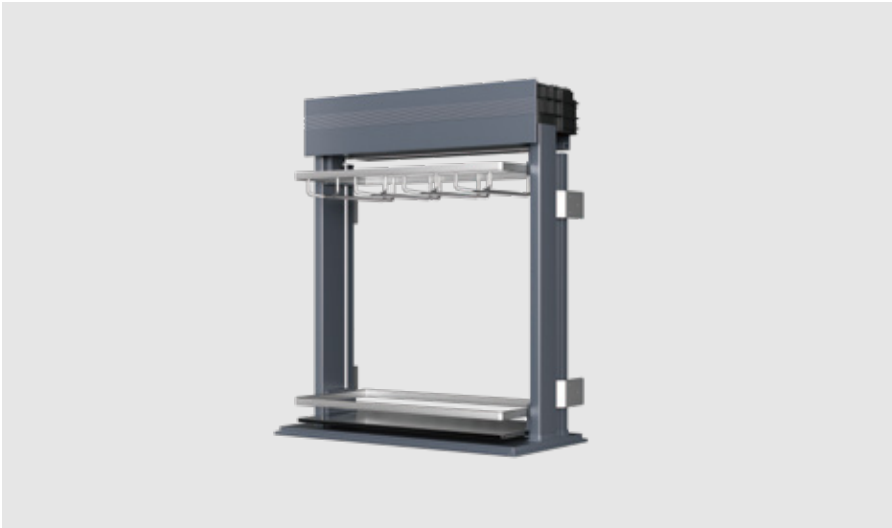

TM 07

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·600/700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	

TONO





TM 08

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·600/700/800/900mm	·Outer height 700mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	

TONO



Haier



TM 09

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600/ 700/800/900mm	·Outer height 900mm	·Depth 256mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	





TM 10

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
· 50/400/500/600/ 700/800/900mm	·Outer height 700mm	·Depth 190mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Lifting Distance: 550-580mm	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Anti-Collision Designed: Stop whenever Collide	



1 ▶ r-a.



TM 11

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
· 50/400/500/600/ 700/800/900mm	· Outer height 700mm	· Depth 190mm	· 20KG	· 8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

· Input Voltage: 100-240V	· LED Strip Position: Both Sides+Bottom	· Output Voltage: 12V
· Rated Power: 60W	· Lifting Distance: 550-580mm	· Noise DB: Unmute 45db
· Product Color: Dark Gray	· Product Material: Aviation Grade Al-Alloy	· Lighting Color: 4000K
· Fatigue Test: 30,000 Times	· Anti-Collision Designed: Stop whenever Collide	





TM 12

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600/ 700/800/900mm	·Outer height 700mm	·Depth 134mm	·20KG	·8 Seconds

CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	



1 ▶ r-a.



TM 13

Regular Width	Cabinet Height	Bottom Hole	Bearing Load	Descent Time
·350/400/500/600/ 700/800/900mm	·Outer height 700mm	·Depth 134mm	·20KG	·8 Seconds


CUSTOMISED SERVICES

- Support Custom dimension and color
- Support Custom Voice/Remote /App Control System

ADDITIONAL DETAILS

·Input Voltage: 100-240V	·LED Strip Position: Both Sides+Bottom	·Output Voltage: 12V
·Rated Power: 60W	·Anti-Collision Designed: Stop whenever Collide	·Noise DB: Unmute 45db
·Product Color: Dark Gray	·Product Material: Aviation Grade Al-Alloy	·Lighting Color: 4000K
·Fatigue Test: 30,000 Times	·Lifting Distance: 550-580mm	

Motorised Lifting Kitchen Systems

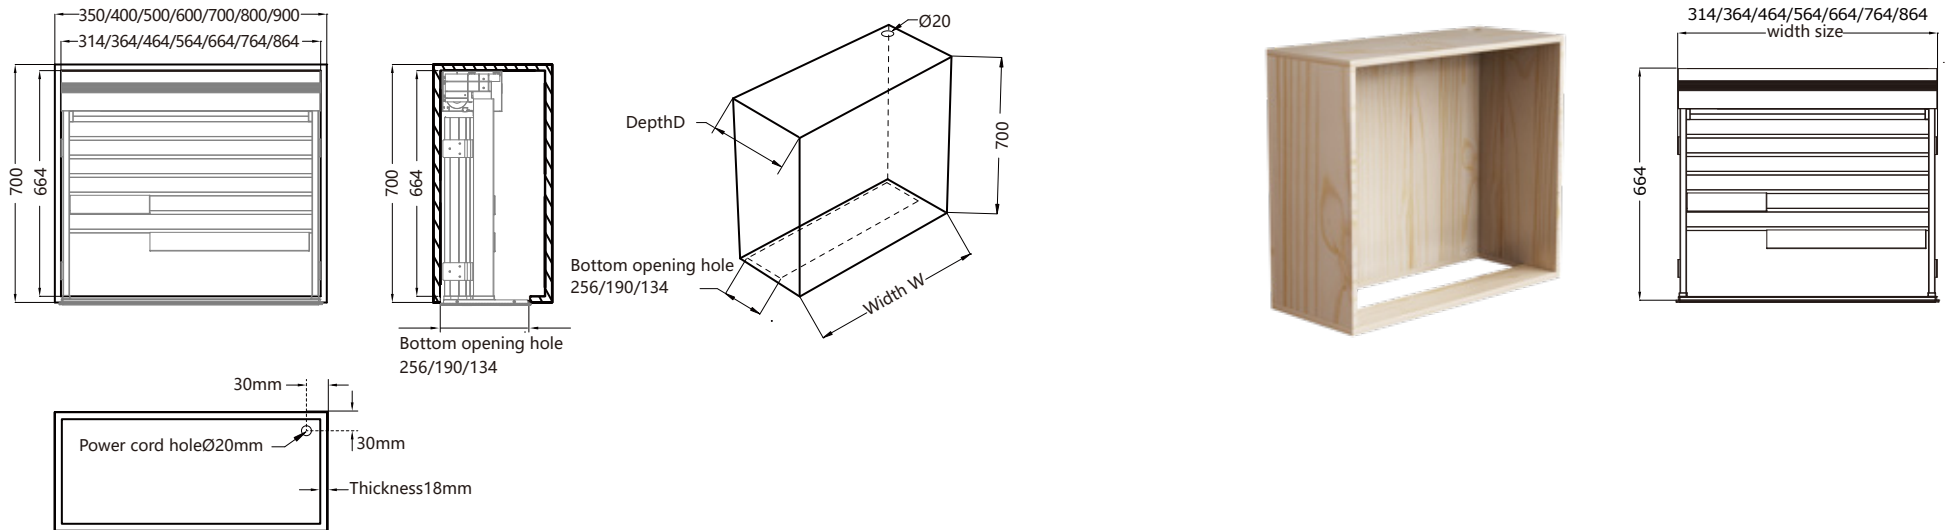

Cabinet width	Cabinet board thickness	Cabinet inner size width x high	Cabinet depth	Bottom hole depth	Top hole size
W=350mm	18mm	314x664mm	≥256mm	256/190/134mm	Φ20mm
W=400mm	18mm	364x664mm	≥256mm	256/190/134mm	Φ20mm
W=500mm	18mm	464x664mm	≥256mm	256/190/134mm	Φ20mm
W=600mm	18mm	564x664mm	≥256mm	256/190/134mm	Φ20mm
W=700mm	18mm	664x664mm	≥256mm	256/190/134mm	Φ20mm
W=800mm	18mm	764x664mm	≥256mm	256/190/134mm	Φ20mm
W=900mm	18mm	864x664mm	≥256mm	256/190/134mm	Φ20mm